

# ARMOR POXY

## ARMORPOXY II & ARMORULTRA FLOOR COATING SYSTEMS

**ARMORPOXY II** is a unique self-priming industrial coating normally used in conjunction with ArmorUltra Topcoat but can be used alone for less demanding environments. Easy to apply, Armorpoxy II is a 50/50 mix, and once mixed, applies just like paint. Armorpoxy II can be applied to bare concrete or painted floors (properly prepped) or wood and metal primed surfaces. Applies at 7 - 12 mils standard thickness. See our website for full technical info. Armorpoxy II comes standard in a satin finish. For high gloss, use Armor Ultra Topcoat. For maximum wear/skid resistance combine Ultra Wear High Wear Non-Skid Additive to ArmorUltra Topcoat. Armorpoxy II is our best-selling epoxy floor coating system, used by the U.S. Coast Guard & Air Force in their hangars. Applies with standard rollers, has long working times, no special skills are required. Available in low VOC versions as an option.

**ARMORULTRA** is our finest, thickest, and most durable military-grade flooring system. ArmorUltra is a 3-layer system of primer, 100% solids high build Ultra Epoxy, and ArmorUltra Top-coat. ArmorUltra, when applied, results in a 23-30 mils thick floor, thick enough for super-demanding commercial/industrial applications. Primer and topcoat apply with standard rollers, Ultra epoxy applies with our calibrated notched squeegee, allowing for the 'high build' and thickness. ArmorUltra is approximately 2.5-3 times thicker than Armorpoxy II.




Available in these colors. No minimums. Custom colors available. Minimum order for custom colors 5,000 SQ FT

### POLYMER COATINGS COLOR CHART

Tile Red	Beige	Med. Gray
Lt. Gray	Off White	Charcoal Gray
Dk. Gray	Lt. Blue	Tan
Brown	Blue	Green
Desert Tan	Khaki Tan	Traffic Yellow
		Safety Yellow




### The ARMORPOXY II System

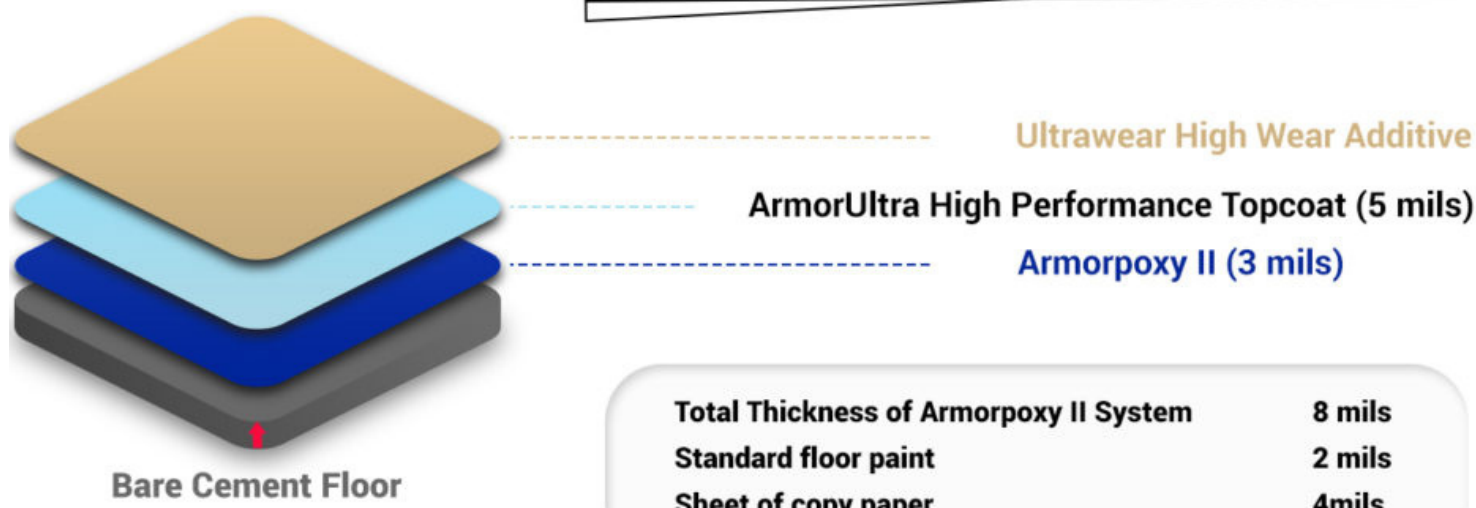

So... Armorpoxy II is over 4 times thicker than floor paint!



### The ARMORULTRA System

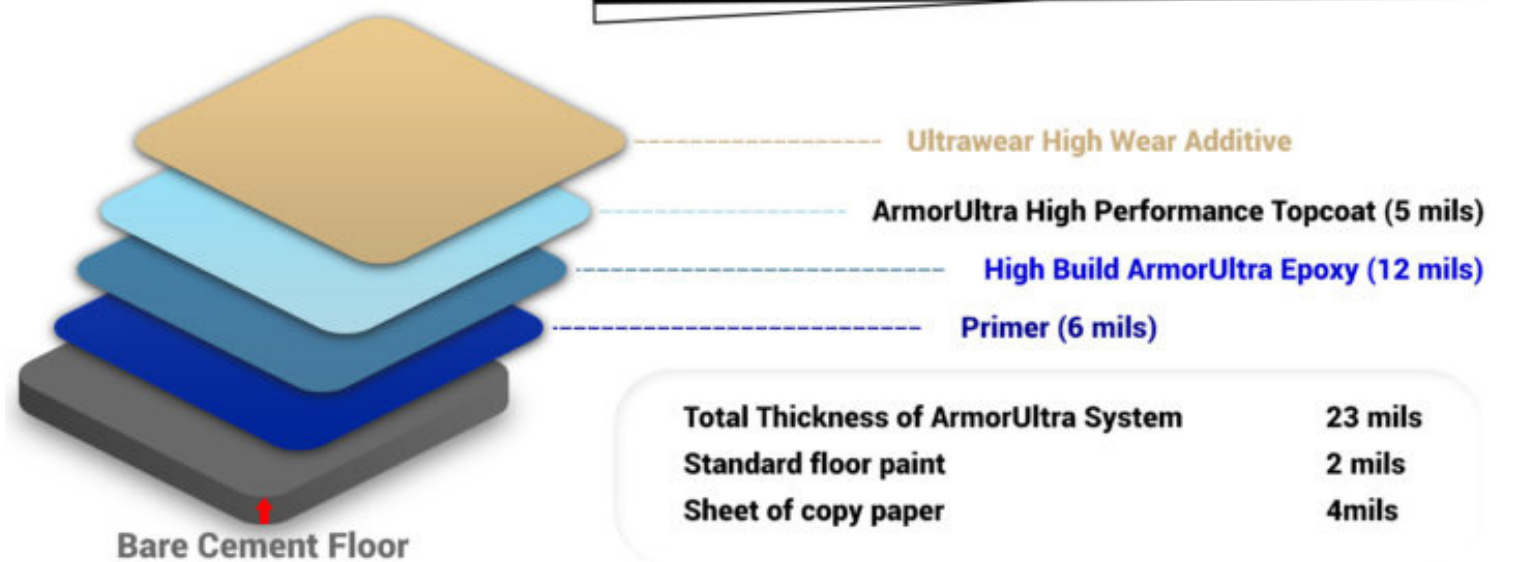

So... ArmorUltra is over 10 times thicker than floor paint!